



# **Dolby Conference Phone**

## **Configuration Guide for RingCentral**

Version 3.4  
31 January 2018

# Copyright

© 2018 Dolby Laboratories. All rights reserved.

## **Dolby Laboratories, Inc.**

1275 Market Street  
San Francisco, CA 94103-1410 USA  
Telephone 415-558-0200  
Fax 415-863-1373  
<http://www.dolby.com>

# Trademarks

Dolby and the double-D symbol are registered trademarks of Dolby Laboratories

The following are trademarks of Dolby Laboratories:

Dialogue Intelligence™	Dolby Theatre®
Dolby®	Dolby Vision™
Dolby Advanced Audio™	Dolby Voice®
Dolby Atmos®	Feel Every Dimension™
Dolby Audio™	Feel Every Dimension in Dolby™
Dolby Cinema™	Feel Every Dimension in Dolby Atmos™
Dolby Digital Plus™	MLP Lossless™
Dolby Digital Plus Advanced Audio™	Pro Logic®
Dolby Digital Plus Home Theater™	Surround EX™
Dolby Home Theater®	

All other trademarks remain the property of their respective owners.

# Patents

This product is protected by one or more patents in the United States and elsewhere. For more information, including a specific list of patents protecting this product, please visit <http://www.dolby.com/patents>.

---

# Contents

<b>1</b>	<b>Introduction.....</b>	<b>4</b>
1.1	About this guide.....	4
1.2	New in this version.....	4
1.3	Related documentation.....	4
1.4	Documentation feedback.....	4
<b>2</b>	<b>Configuration procedures.....</b>	<b>5</b>
2.1	Opening the phone web interface.....	5
2.2	Setting RingCentral configuration parameters.....	6
2.3	Setting the phone display name.....	6
	<b>Glossary.....</b>	<b>8</b>

# 1 Introduction

Deploying the Dolby Conference Phones with RingCentral is a multi-step process. This guide provides an overview of the process.

- [About this guide](#)
- [New in this version](#)
- [Related documentation](#)
- [Documentation feedback](#)

## 1.1 About this guide

This document provides instructions for configuring Dolby Conference Phones to work with the RingCentral platform.

Before you begin deployment, make sure that you have copies of the related documentation. You may need to refer to other documents for more information and specific instructions.

## 1.2 New in this version

Dolby Conference Phone software (version 3.4) does not include any updates to this document.

## 1.3 Related documentation

Review all of the Dolby Conference Phone documentation to ensure that the phone is set up correctly so that you have the best conferencing experience possible.

These documents are available:

- *Dolby Conference Phone Administrator's Guide*  
This guide explains how to set up and provision the Dolby Conference Phone.
- *Dolby Conference Phone Quick Start Guide*  
This guide describes the contents of the phone package, how to assemble the phone, and how to connect the phone to the network. The quick start guide is included in the phone package. It is also available from the Dolby Conference Phone support pages.
- *Dolby Conference Phone open source software guide*  
This guide describes the open source software used in the Dolby Conference Phone software.
- *Dolby Satellite Microphones quick start guide*  
This guide describes the contents of the microphone package and how to connect them to the Dolby Conference Phone. The quick start guide is included in the microphone package. It is also available from the Dolby Conference Phone support pages.

## 1.4 Documentation feedback

If you have comments or feedback about this documentation, send us an email at [dolbyvoicedocs@dolby.com](mailto:dolbyvoicedocs@dolby.com).

## 2 Configuration procedures

After you configure the Dolby Conference Phone network settings and options, you can activate the phone with RingCentral.

- [Opening the phone web interface](#)
- [Setting RingCentral configuration parameters](#)
- [Setting the phone display name](#)

### 2.1 Opening the phone web interface

Enter the phone IP address in your web browser to open the phone web interface.


#### Prerequisites

You must have a network-connected desktop or laptop computer with a web browser supporting HTML5 installed. (Modern versions of Internet Explorer, Firefox, Chrome, and Safari are supported.)

The web browser will be used to configure the phone, so it must have IP network connectivity to the Dolby Conference Phone.

#### Procedure

1. From the phone home screen, tap this sequence:



2. Scroll down until you see the IP address.




3. Enter this URL in the browser address bar.

If a security warning displays, accept the warning and proceed.

`https://your phone IP address`

4. Log in to the Dolby Conference Phone using the default credentials:

- **Username** = admin
- **Password** = 1739

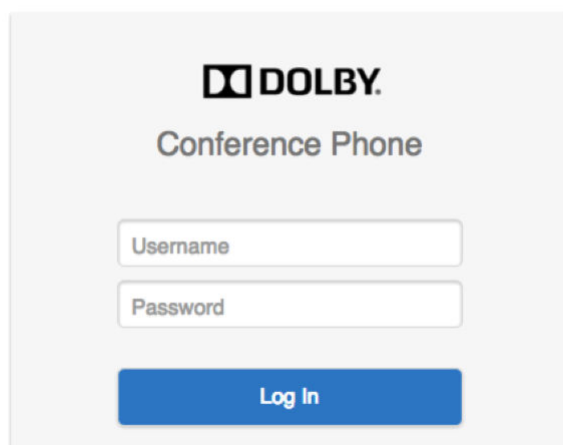


## 2.2 Setting RingCentral configuration parameters

The phone does not connect to RingCentral by default. You must configure the phone to automatically connect to RingCentral.

*Table 1: Dolby Conference Phone IP PBX configuration mapping for RingCentral*

Dolby Conference Phone IP PBX setting	RingCentral setting
Server: SIP Domain Name	SIP Domain (server)
Account: Transport Port	SIP Domain (port)
Server: Primary Call Server/Outbound Proxy	Outbound Proxy (server)
Server: Primary Call Server/Outbound Proxy Port	Outbound Proxy (port)
Account: Extension Number/Address	User Name
Credential: User Credential Password	Password
Credential: User Credential Name	Authorization ID

 **Note:** In the table above, SIP Domain: <SIP Domain (server)>:<SIP Domain (port)> and Outbound Proxy: <Outbound Proxy (server)>:<Outbound Proxy (port)>

## 2.3 Setting the phone display name


The display name on the phone will appear in the conference roster when the phone joins conference calls, so this should be configured to a meaningful name.

- Use one of these procedures to set the display name of the phone:
- From the Dolby Conferencing Console software:
  - a) From Dolby Conferencing Console, select a device, and then click the **Edit device configuration** button.



- b) From **IP IPBX > Account**, drag **Display name** to the device configuration.
  - c) In the `Sip.Account.DisplayName` field, type a device name.
- From the phone web interface:
    - a) Click the **+** to open the **IP PBX Settings > Account** section.

b) In the **Display Name** field, enter the device name.

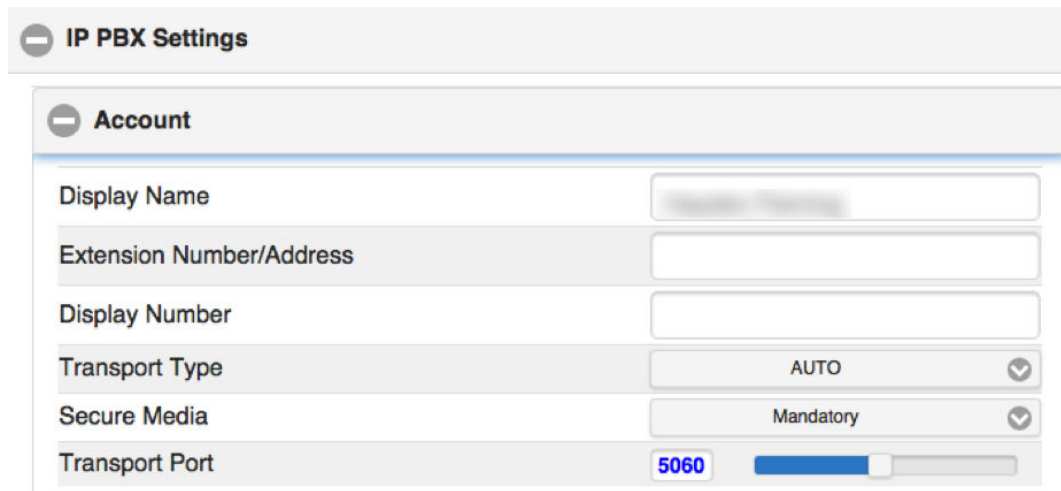

The image shows a configuration interface for IP PBX Settings. It is divided into two main sections: 'IP PBX Settings' and 'Account'. The 'Account' section contains several fields for configuration:

Field Name	Value / Control
Display Name	[Empty text input field]
Extension Number/Address	[Empty text input field]
Display Number	[Empty text input field]
Transport Type	AUTO (dropdown menu)
Secure Media	Mandatory (dropdown menu)
Transport Port	5060 (text input) with a slider control

# Glossary

**HTTP**

Hypertext Transfer Protocol. An application protocol for hypermedia information systems, and the foundation for data communication for the World Wide Web.

**HTTPS**

Hypertext Transfer Protocol Secure. An application protocol for secure communication over a network and the Internet that provides authentication of websites and keeps user information private.

**IP**

Internet Protocol.

**IP address**

Internet Protocol address. A numerical identifier assigned to a device that is a member of a network that uses the IP for communication.

**PBX**

Private branch exchange. A phone system that is delivered as a hosted service.

**PoE**

Power over Ethernet. A solution in which an electrical current is run to networking hardware over Ethernet category 5 or higher data cabling.

**RTP**

Real-time Transport Protocol. An IP network audio and video protocol.

**SIP**

Session Initiation Protocol. An application-layer communications protocol used for signaling and controlling communications sessions.

**TCP/IP**

Transmission Control Protocol/Internet Protocol. Communications protocols that specify how data should be formatted, addressed, transmitted, routed, and received at the destination. Part of the Internet protocols communications suite.